




PLATE **TREME**

PLATE XTREME EDITION 3



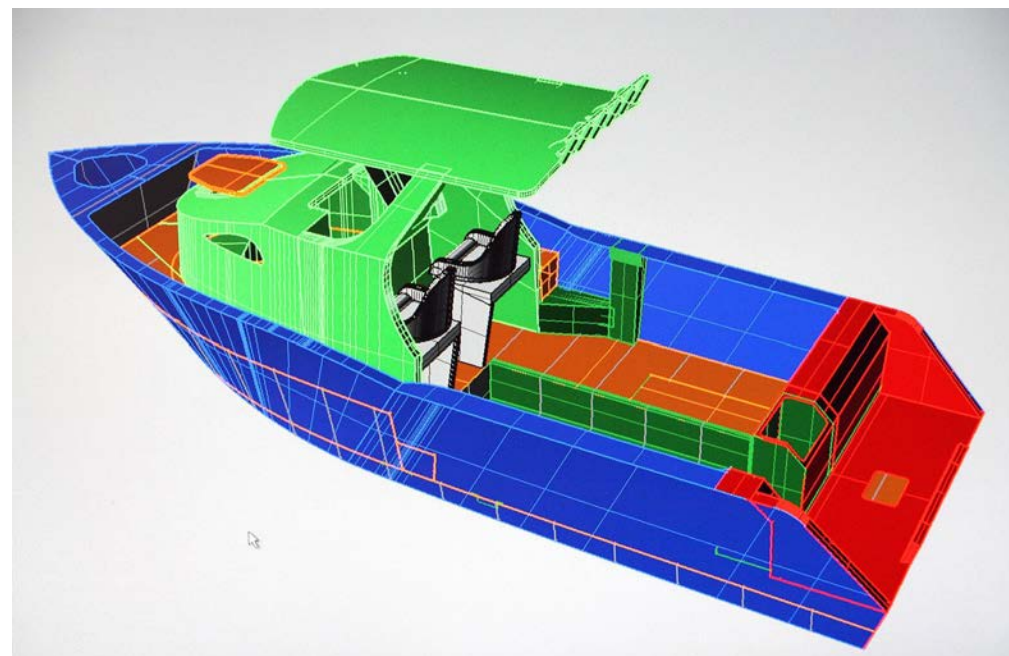

INTRODUCTION

THE PLATE XTREME RANGE

Our Plate Xtreme models are a FULL PLATE construction with structural strength second to none.

All models are designed and cut within the factory using CNC (computerized cutting) therefore making our hulls cost efficient to manufacture.

A fully welded self draining floor is fitted with foam buoyancy underneath as well as air chambers.

The Plate Xtreme hull is a solid but very stable hull that plains easily and together with a reverse chine gives a soft ride.

With modern lines and quality fittings our Plate Xtreme models are top shelf when it comes to choosing a plate hull.



ENFORCER

The 4.8 Enforcer the smallest member of our Plate range is a Side Console, with open 25 inch transom, keeping you well above the water line and well suited to many applications. Classed as a real all-rounder, giving a soft ride in choppy water conditions, and suited to estuary fishing, crabbing, prawning, and if the weather is favourable a short trip to the reef is not out of the question. Boosting a large deck and platform area there is loads of room for all fishing and boating needs, with room behind the console specially designed to fit your regular round collapsible crab pots.





Scan the QR Code with your smart phone to view further details online
or visit www.seajayboats.com.au/boats/plate-xtreme-enforcer/

ENFORCER SPECIFICATIONS (SEE PAGE 20 FOR BOAT FEATURES)

	4.8
3D designed & CNC cut within factory	•
bottoms (mm)	4.0
sides (mm)	4.0
transom (mm)	4.0
bulkheads - longitudinal (mm)	3.0
bulkheads - solid (mm)	4.0
keel - solid (mm)	4.0
beam (m)	2.2
hull length (m)	4.82
overall length (m)	4.95
dead rise (deg) (at transom)	16
depth (m)	1.09
depth (m) - including console & rail	1.49
overall height on trailer (m)	1.96
length on trailer engine down	6.41
no. of persons (at 80kg per person)	5
weight - hull only (kg) *	470
weight - boat (dry) / motor / Trailer (kg)*	1030
rec hp	70
max hp	80
max motor weight (kg)	175

* This is an approximate weight.

5.1 / 5.6 / 6.0 / 6.4 / 6.8 PREDAKING



PREDAKING

The "Preda-King", consists of the extremely fishable, ever popular centre console layout. Being of solid plate design, the structural strength of this hull is far superior than any pressed boat on the market. The Preda-King features our reverse chine which, combined with perfect weight distribution throughout, assists in making it a very soft, quiet and extremely comfortable riding craft. Smooth lines and aspiring aesthetics make this serious work horse look more like a pleasure craft that any boatie would be proud to own.





Scan the QR Code with your smart phone to view further details online or visit www.seajayboats.com.au/preda-king



PREDA KING SPECIFICATIONS (SEE PAGE 18 FOR BOAT FEATURES)

	5.1	5.6	6.0	6.4	6.8
3D designed & CNC cut within factory	•	•	•	•	•
bottoms (mm)	4.0	4.0	5.0	5.0	5.0
sides (mm)	4.0	4.0	4.0	4.0	4.0
transom (mm)	4.0	4.0	4.0	5.0	5.0
stringers - longitudinal (mm)	4.0	4.0	4.0	5.0	5.0
bulkheads - solid (mm)	3.0	3.0	3.0	4.0	4.0
keel - solid (mm)	4.0	4.0	4.0	5.0	5.0
beam (m)	2.25	2.3	2.39	2.49	2.49
hull length (m / f)	5.15 / 16.9	5.68 / 18.5	5.98 / 19.5	6.4 / 21	6.85 / 22
overall length (m / f)	5.45 / 17.9	5.96 / 19.5	6.26 / 20.5	6.7 / 22	7.1 / 23
dead rise (deg) (at transom)	17	17.5	19	19.5	19.5
distance between bulkheads (mm)	525 (avg)	500 (avg)	600 (avg)	575 (avg)	480 (avg)
depth (m)	1.29	1.31	1.45	1.52	1.59
depth (m) - keel to top of console screen	-	1.87	1.94	2.0	2.0
depth (mm) - internal floor to top of side deck (freeboard)	580	640	660	690	700
depth (m) - keel to top of folding hardtop	-	2.85	2.92	2.87	2.87
depth (m) - keel to top of hardtop when folded	-	1.98	1.98	2.03	2.03
no. of persons (at 80kg per person)	5	6	6	7	7
weight - hull only (kg) *	-	710	-	940	1025
weight - boat (dry) / motor / Trailer (kg)*	-	1355	-	2060	2145
rec hp	80	115	130	150	175
max hp	115	150	150	200	230
max motor weight (kg)	230**	230	240	350	390

* This is an approximate weight. **Max hp may require a fin



STRIKER

Our Striker model has all this and more. The console has been positioned towards the stern of the Boat to maximise deck space allowing for a huge fishing platform or simply an area to roll out the swag for an overnight trip. In the step up Floor, not one but two under floor dry storage cavities can be found with one cavity large enough to stow away an Esky to help keep the top deck clutter free. A massive fuel tank has been squeezed under the floor allowing you to feel confident knowing that you can reach your favourite fishing destination.





Scan the QR Code with your smart phone to view further details online or visit www.seajayboats.com.au/striker

STRIKER SPECIFICATIONS (SEE PAGE 18 FOR BOAT FEATURES)

	5.1	5.6	6.0
3D designed & CNC cut within factory	•	•	•
bottoms (mm)	4.0	4.0	5.0
sides (mm)	4.0	4.0	4.0
transom (mm)	4.0	4.0	4.0
stringers - longitudinal (mm)	4.0	4.0	4.0
bulkheads - solid (mm)	3.0	3.0	3.0
keel - solid (mm)	4.0	4.0	4.0
beam (m)	2.25	2.3	2.3
hull length (m / f)	5.15 / 16.9	5.68 / 18.5	5.98 / 19.5
overall length (m / f)	5.45 / 17.9	5.96 / 19.5	6.26 / 20.5
dead rise (deg) (at transom)	17	17.5	19
distance between bulkheads (mm)	525 (avg)	500 (avg)	600 (avg)
depth (m)	1.29	1.31	TBA
depth (m) - keel to top of console screen	1.64	1.94	TBA
depth (mm) - internal floor to top of side deck (freeboard)	580	640	TBA
no. of persons (at 80kg per person)	5	6	6
weight - hull only (kg) *	645	710	TBA
weight - boat (dry) / motor / Trailer (kg)*	1270	1335	TBA
rec hp	80	115	115
max hp	115	150	150
max motor weight (kg)	230**	230	240

* This is an approximate weight. **Max hp may require a fin



PURSUIT

If you're after a true offshore Plate Boat with long range capabilities, then the Pursuit range of Plate Xtreme Boats is for you. The Pursuit boasts unrivaled strength and handling that is absolute paramount when heading out into open waters. The full plate construction leaves nothing to chance with safety coming in the form of foam filled cavities and a full buoyancy chamber due to the fully sealed, self draining floor. With sleek lines, gracious curves, and eye catching graphics, the Pursuit will turn heads where ever it goes.





PURSUIT SPECIFICATIONS (SEE PAGE 18 FOR BOAT FEATURES)

	5.6	6.0	6.4	6.8	7.2	7.6
3D designed & CNC cut within factory	•	•	•	•	•	•
bottoms (mm)	4.0	5.0	5.0	5.0	5.0	5.0
sides (mm)	4.0	4.0	4.0	4.0	4.0	4.0
transom (mm)	4.0	4.0	5.0	5.0	5.0	5.0
stringers - longitudinal (mm)	4.0	4.0	5.0	5.0	5.0	5.0
bulkheads - solid (mm)	3.0	3.0	4.0	4.0	4.0	4.0
keel - solid (mm)	4.0	4.0	5.0	5.0	5.0	5.0
beam (m)	2.3	2.39	2.49	2.49	2.49	2.49
hull length (m / f)	5.6 / 18	6.0 /	6.4 /	6.85 /	7.25 /	7.65 /
		19	21	22	24	25
overall length (m / f)	5.88 / 19	6.26 /	6.7 /	7.1 /	7.6 /	8.0 /
		20.5	22	23	25	26
dead rise (deg) (at transom)	17.5	19	19.5	19.5	20	20
distance between bulkheads (mm - avg)	500	600	575	480	470	470
depth (m)	1.31	1.45	1.52	1.59	1.68	1.69
depth (m) - cabin step down floor to cabin roof	1.25		1.53	1.59	1.68	1.69
depth (mm) - internal floor to top of side deck (freeboard)	0.6	0.66	0.68	0.7	0.75	0.725
depth (m) - keel to top of hardtop	-	-	2.53	2.56	2.66	2.66
depth (m) - keel to top of rocket launcher	-	-	2.78	2.81	2.91	2.91
no. of persons (at 80kg per person)	6	6	7	7	7	7
weight - hull only (kg) *	795	-	1180	1290	1480	1500
weight - boat (dry) / motor / Trailer (kg)*	1540	-	2180	2420	2650	2700
rec hp		130	150	175	225	250
max hp	150	150	200	230	250	300
max motor weight (kg)	230	240	350	390	390	460

* This is an approximate weight.



PURSUIT GS

If you're after a true offshore Plate Boat with long range capabilities, then the Pursuit range of Plate Xtreme Boats is for you. Masterfully engineered in house using the latest in 3D modelling, the Pursuit boasts unrivaled strength and handling that is absolute paramount when heading out into open waters. The full plate construction leaves nothing to chance with safety coming in the form of foam filled cavities and a full buoyancy chamber due to the fully sealed, self draining floor. With sleek lines, gracious curves, and eye catching graphics, the Pursuit will turn heads where ever it goes.





PURSUIT GS SPECIFICATIONS (SEE PAGE 20 FOR BOAT FEATURES)

	6.8
3D designed & CNC cut within factory	•
bottoms (mm)	5.0
sides (mm)	4.0
transom (mm)	5.0
stringers - longitudinal (mm)	5.0
bulkheads - solid (mm)	4.0
keel - solid (mm)	5.0
beam (m)	2.49
hull length (m / f)	6.85 / 22
overall length approximate inc motor (down) & trailer (m)	9.0
overall height approximate including trailer (m)	3.4
dead rise (deg) (at transom)	19.5
depth (m) - cabin step down floor to cabin roof	1.59
depth (m) – internal floor to top of side deck (freeboard)	0.7
depth (m) - keel to top of hardtop	2.61
depth (m) - keel to top of rocket launcher	2.86
no. of persons (at 80kg per person)	7
weight approximate – hull only (kg)*	1370
weight approximate – boat (dry) / motor / trailer (kg)*	2500
rec hp	225
max hp	250
max motor weight (kg)	390



For more info scan the QR Code with your smart phone or visit
www.seajayboats.com.au/boats/plate-xtreme-pursuit-gs/

* This is an approximate weight.



PURSUIT GS

The 8.1 Pursuit (Glass Screen) hardtop is the largest of the Plate Xtreme hulls, this model is an impressive off shore cab, with long range capabilities. The 8.1 Pursuit GS built to true Plate construction guidelines, is worthy of being the all new flagship of the SeaJay Plate Xtreme range. The structural strength of this hull is superior with 6mm Bottoms and Transom and 4mm Sides, the Pursuit Hull also features our reverse chine which, combined with perfect weight distribution throughout, assists in making this a very soft, quiet and extremely comfortable riding craft.





PURSUIT GS SPECIFICATIONS (SEE PAGE 20 FOR BOAT FEATURES)

	8.1
3D designed & CNC cut within factory	•
bottoms (mm)	6.0
sides (mm)	4.0
transom (mm)	6.0
stringers - longitudinal (mm)	5.0
bulkheads - solid (mm)	4.0
keel - solid (mm)	6.0
beam (m)	2.75
hull length (m / f)	8.8 / 29
overall length approximate inc motor (down) & trailer (m)	9.9
overall height approximate including trailer (m)	3.5
dead rise (deg) (at transom)	20
depth (m) - cabin step down floor to cabin roof	1.6
depth (m) – internal floor to top of side deck (freeboard)	0.8
depth (m) - keel to top of hardtop	2.70
depth (m) - keel to top of rocket launcher	2.97
no. of persons (at 80kg per person)	7
weight approximate – boat (dry) / motor / trailer (kg)*	3800
rec hp	300
max hp	500
max motor weight (kg)	520



For more info scan the QR Code with your smart phone or visit
www.seajayboats.com.au/boats/plate-xtreme-pursuit-gs/



* This is an approximate weight.



FREEDOM

The "Ultimate Fishing Platform" is not a term that can be thrown around lightly, however our Freedom plate alloy models with 360deg of fishable area would come very close. Developed as a Centre Cab, the Freedom allows full movement around the deck with ease when that elusive Mackerel or King fish decides to nosedive under the Boat. The Freedom features, solid internal bulkheads, stringers and keel, reverse chine hull, a massive fuel capacity and of course a style and flair that will make you the envy of other Boaties out on the water.



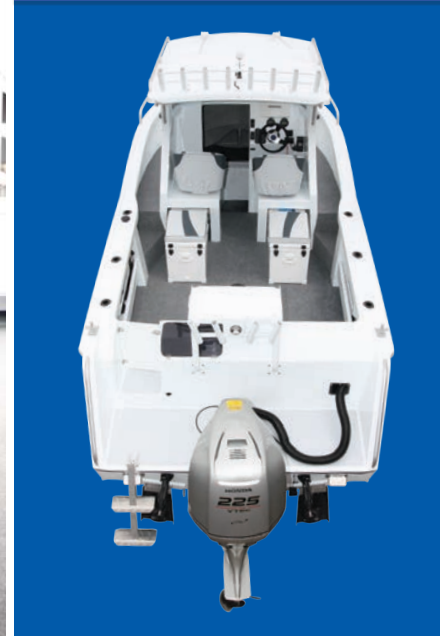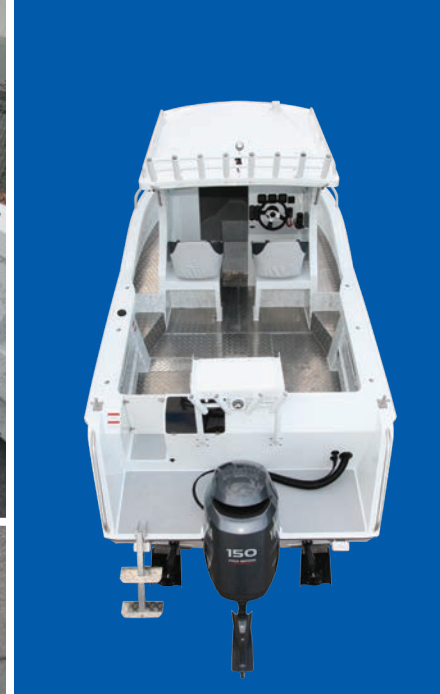

FREEDOM SPECIFICATIONS (SEE PAGE 18 FOR BOAT FEATURES)

	6.0	6.4	6.8	7.6
3D designed & CNC cut within factory	•	•	•	•
bottoms (mm)	5.0	5.0	5.0	5.0
sides (mm)	4.0	4.0	4.0	4.0
transom (mm)	4.0	5.0	5.0	5.0
stringers - longitudinal (mm)	4.0	5.0	5.0	5.0
bulkheads - solid (mm)	3.0	4.0	4.0	4.0
keel - solid (mm)	4.0	5.0	5.0	5.0
beam (m)	2.39	2.49	2.49	2.49
hull length (m / f)	6.0 / 19.7	6.4 / 21	6.85 / 22	7.65 / 25
overall length (m / f)	6.25 / 20.5	6.7 / 22	7.1 / 23	8.0 / 26
dead rise (deg) (at transom)	19	19.5	19.5	20
distance between bulkheads (mm)	600 (avg)	575 (avg)	480 (avg)	470 (avg)
depth (m)	1.4	1.52	1.59	1.69
depth (m) - cabin step down floor to cabin roof	1.3	1.57	1.57	1.57
depth (mm) - internal floor to top of side deck (freeboard)	.66	.69	0.7	0.725
depth (m) - keel to top of hardtop	2.53	2.53	2.56	2.66
depth (m) - keel to top of rocket launcher	2.77	2.78	2.81	2.91
no. of persons (at 80kg per person)	6	7	7	7
weight - hull only (kg)*	1045	1170	1335	1500
weight - boat (dry) / motor / Trailer (kg)*	1935	2170	2465	2700
rec hp	130	150	175	250
max hp	150	200	230	300
max motor weight (kg)	195	230	240	350

* This is an approximate weight.

FEATURES

STANDARD HULL FEATURES

[illegible]

STANDARD FIT OUT INCLUSIONS

[illegible]

FEATURES

STANDARD HULL FEATURES

[illegible]



Bait Board with Storage Draw



Bunk Infill



Canopy - Hard Top to Transom



Canopy - Hard Top to Transom



Canvas Cabin Door With Fly Screen



Chemical Toilet



Deck Wash



DLX Seat Box With Rear Seat



DLX Seat Box With Sink



Electric Toilet



Electric Trim Tabs



Fridge Freezer - 60ltr



Front Clears



Front Travel Bra



Full Travel Cover



Humminbird GPS - Sounders



Ice Box Slide



Kill Tank



Padded Side Coamings



Seat Box With 110ltr Ice Box



Raymarine Auto Pilot



Raymarine Electronics



Raymarine Radar



Raymarine Sounder GPS



Rear Bimini -Off Hard Top



Spot Light - LED



Stress Free Anchor Winch











Tackle Tray



Twin Engines



VHF & 27Mhz Radio

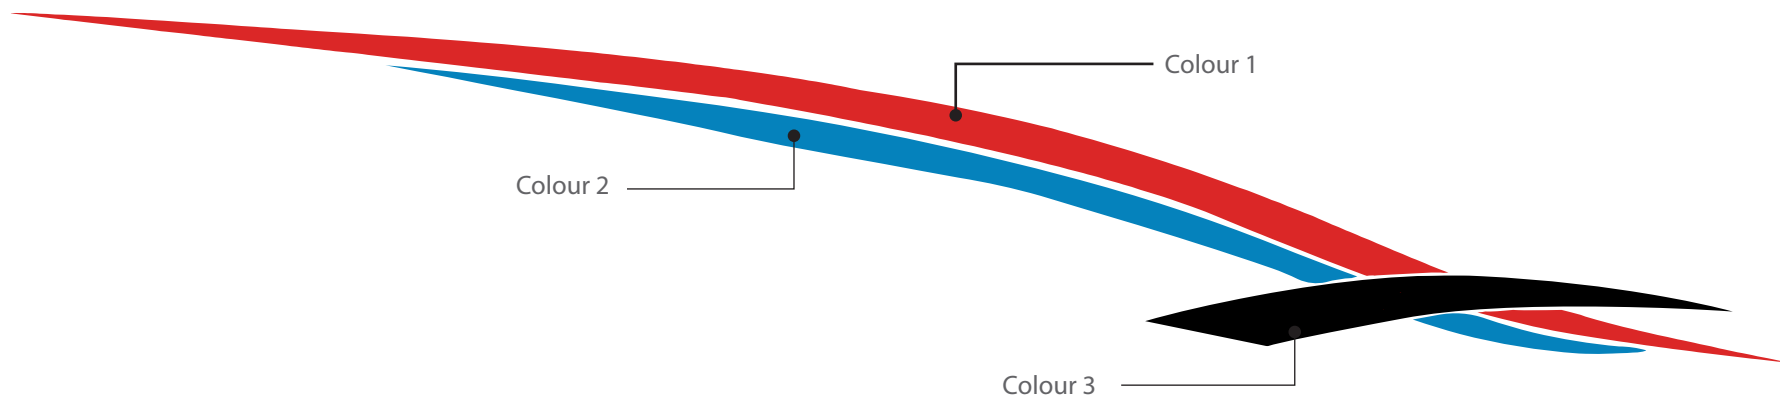

Go to our website to choose your own colour combinations.



Please note: Colours shown are approximate

Upholstery Colours



Optional Painted Side Hull Colours



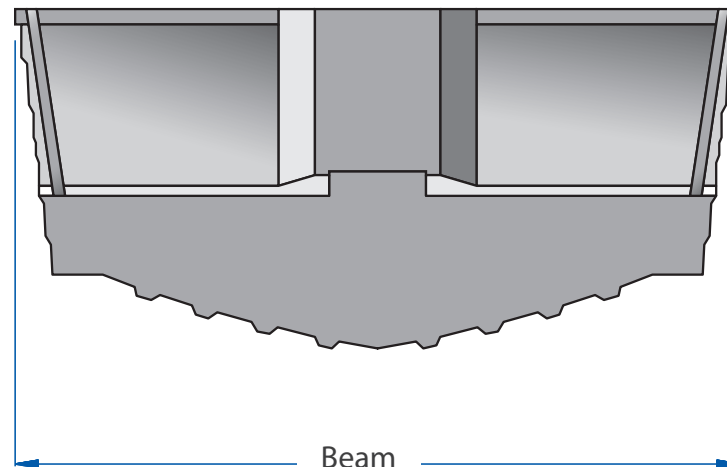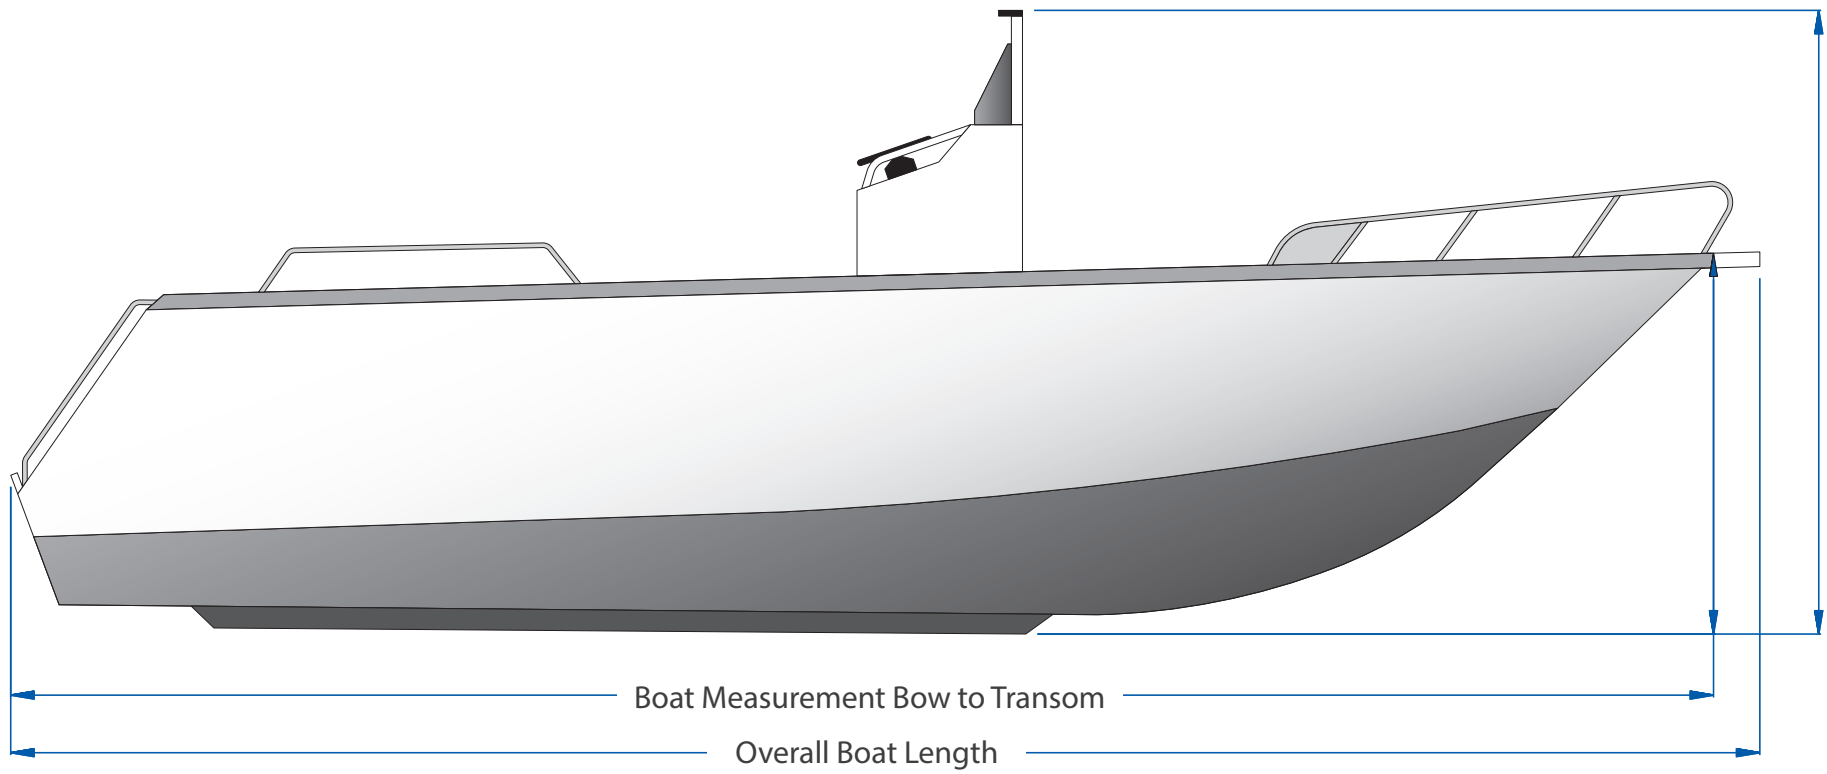

WARRANTY

SEA JAY GROUP PTY LTD A.C.N. 141 380 298

This document states terms of the Warranty given by the Company in respect of products manufactured by it.

1. INTERPRETATION

In this document:-

- 1.1 "The Company" means Sea Jay Group Pty Ltd A.C.N. 141 380 298.
- 1.2 "The Purchaser" means the original person or entity of any boat sold through an authorised Sea Jay Boats Dealership.
- 1.3 "Boat" means any aluminium boat or accessory manufactured by the Company.
- 1.4 "Warranty Period" means a period of five years (60 months) on the Hull structure (waterline down) from the date of delivery to the ORIGINAL purchaser.

2.0 WARRANTY

- 2.1 The Company warrants to the Purchaser that:-
 - 2.1.1 The quality of the materials used in the construction of the boat is in accordance with or above, the standard usual in the aluminium boat building industry; and
 - 2.1.2 The boat will remain free of defects during the warranty period.

3.0 WORKS UNDER WARRANTY

- 3.1 To obtain the benefit of the warranty the Purchaser must return the boat to its place of purchase.
- 3.2 Warranty does not cover any consequential expenses beyond the warranty repair itself. Eg. Freightage
- 3.3 Sea Jay Boats shall not be liable for consequential loss of any kind arising out of the supply or operation of the Boat.

4.0 EXCLUSIONS

- 4.1 The warranty will not cover any defect or damage caused by:-
 - 4.1.1 Operating outside design limitations
 - 4.1.2 Misuse, abuse or negligence
 - 4.1.3 Normal Wear and Tear
 - 4.1.4 Use of a motor which has more power or weight than recommended on the compliance plate attached to the Boat.
 - 4.1.5 Improper Trailer fitup. Eg. Incorrect tie down of Boat to Trailer, no Engine support bracket and off road use.
- 4.2 Paint is not warranted against the effects of oxidization, wear and tear, electrolysis or damage caused by fuel and dissimilar metals. This also includes normal oxidization around unsealed edges and fittings.
- 4.3 Factory fitted parts, fittings or extras are subject to a 1 year (12 month) limited warranty only. Such items include:- Vinyl Wraps, Carpet, Upholstery, Pre-Rigging and Windscreens (including console screens) etc, etc.
- 4.4 Vinyl Wraps are warranted against defective application, NOT against Damage caused by solvent/petrol etc or damage due to misuse
- 4.5 Any alterations / modifications to the Boat once it has left the factory will void any/all remaining warranty.
- 4.6 Superstructure will be limited to a 1 year (12 month) warranty. Eg. Hardtops, Alloy Canopies, Seat Boxes or anything welded / fitted to the Hull Structure (above the waterline).

5.0 COMMERCIAL USE

- 5.1 Due to the variance in usage and conditions which may be experienced, the Purchaser must be satisfied the intended Boat is suited for commercial applications.
- 5.2 This Warranty does not cover any boat which has been used for a commercial purpose.

6.0 EXCLUSION OF FURTHER WARRANTIES

- 6.1 Except as stated in this document, no warranty express or implied is given by the Company except any warranty which is implied by law.

GENERAL MAINTENANCE

It is important to follow a few basic rules in providing regular maintenance to your new vessel.

- Always thoroughly wash your entire vessel with fresh water and mild detergent after use.
- A spray of a protective lanolin based product should be re-applied after washing, to all areas where dissimilar metals are fitted. eg. Any Stainless Steel fittings (Windscreen Bolts, Rod Holders, Baitboard etc.)
- If an accessory is fitted after market (not factory fitted) it is important to spray a protective lanolin based product to these areas where salt or moisture can be attracted.
- Leave your vessel permanently tilted to drain after use.

More Detailed information is available within our Owners Manual.



DISCLAIMER

As Sea Jay continues to make improvements to our product, we do reserve the right to change any details that are contained herein.

All specifications quoted in this brochure are approximate and subject to change.

Please note that photos may show accessories or options that are not standard, please check the features for the standard options applicable.

For further information on the Sea Jay Plate Xtreme range please contact us.



2 Maddison Court, Bundaberg QLD 4670

Ph: 07 4152 2111 Fax: 07 4153 5075

Web: www.seajayboats.com.au

PLATE XTREME EDITION 3 - AUGUST 2016

"LIKE" US ON FACEBOOK WWW.FACEBOOK.COM/SEAJAYBOATS

